# **MER1 Series**



### 1kVDC Isolated 1W Single Output DC/DC Converters

A COMPANY	
MERISOSOSC	
MW-SSC	

#### **FEATURES**

- RoHS compliant
- Typical efficiency to 89%
- Wide temperature performance at full load, -40°C to 85°C
- UL 94V-0 package material
- No heatsink required
- Industry standard pinout
- 1kVDC isolation
- 5V, 12V, 15V, 24V, & 48V inputs
- 5V, 9V, 12V, & 15V output
- Fully encapsulated with toroidal magnetics
- No external components required
- No electrolytic or tantalum capacitors
- UL 60950 recognition pending

### **PRODUCT OVERVIEW**

The MER1 series is the new high performance version of our 1W NMR series. The MER1 series is more efficient and offers improved regulation performance for applications where a wide output voltage variation can not be tolerated. They are ideally suited for providing local supplies on control system boards with the added benefit of 1kVDC galvanic isolation to reduce switching noise.



www.murata-ps.com

SELECTION GUIDE	SELECTION GUIDE											
Order Code	Nominal Input Voltage	Output Voltage	Output Current	Input Current at Rated Load	Load Regulation (Typ)	Load Regulation (Max)	Ripple & Noise (Typ)1	Ripple & Noise (Max) <sup>1</sup>	Efficiency (Min.)	Efficiency (Typ.)	Isolation Capacitance	MTTF <sup>2</sup>
	V	V	mA	mA	9	6	mV	р-р	%	%	pF	kHrs
MER1S0505SC	5	5	200	233	5.5	6.5	15	25	82	84	50	
MER1S0509SC	5	9	111	226	4.2	5	11	20	84	87	55	
MER1S0512SC	5	12	84	227	4.6	5.2	9	17	85	87	53	
MER1S0515SC	5	15	67	225	4.4	5	9	17	86	87.5	54	
MER1S1205SC	12	5	200	97	4.5	5	11	20	82	84	49	
MER1S1209SC	12	9	111	95	3	3.4	9	17	84	86.5	66	
MER1S1212SC	12	12	84	93	3	3.4	9	17	86	88.5	91	
MER1S1215SC	12	15	67	94	2.4	2.7	7	17	85	88	78	
MER1S1505SC	15	5	200	79	3.8	4.5	10	20	81	83.5	43	
MER1S1509SC	15	9	111	77	2.4	2.8	8	17	83	86.5	68	
MER1S1512SC	15	12	84	76	2.3	2.7	7	15	84	87.5	75	
MER1S1515SC	15	15	67	75	2.4	2.8	7	15	86	89	107	
MER1S2405SC	24	5	200	50	3.1	3.7	15	25	81	84	52	
MER1S2409SC	24	9	111	48	2.1	2.5	10	20	83	86.5	75	
MER1S2412SC	24	12	84	48	1.8	2.4	9	20	84	87.5	91	
MER1S2415SC	24	15	67	48	1.7	2.3	9	20	84	87.5	101	
MER1S4805SC	48	5	200	26	3.4	3.9	19	30	77	79.5	47	
MER1S4809SC	48	9	111	25	2.4	2.8	14	25	80	83	76	
MER1S4812SC	48	12	84	25	2.0	2.4	12	25	79	82.5	88	
MER1S4815SC	48	15	67	25	1.9	2.4	11	25	80	83	103	

INPUT CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Voltage Range	Continuous operation, 5V input types	4.5	5	5.5		
	Continuous operation, 12V input types	10.8	12	13.2		
	Continuous operation, 15V input types	13.5	15	16.5	V	
	Continuous operation, 24V input types	22.6	24	26.4		
	Continuous operation, 48V input types	43.2	48	52.8		
	5V input types		7	15		
	12V input types		4	12		
Reflected Ripple Current	15V input types		4	12	mA p-p	
	24V input types		8	20		
	48V input types		25	40		

#### ABSOLUTE MAXIMUM RATINGS

260°C
7V
15V
18V
28V
54V

1. See Ripple & Noise characterisation method.

2. Calculated using MIL-HDBK-217F FN2 with nominal input voltage at full load.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified


# **MER1 Series**

### 1kVDC Isolated 1W Single Output DC/DC Converters


OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Rated Power	T <sub>A</sub> =-40°C to 85°C			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to Iow V <sub>IN</sub>		1.05	1.1	%/%
<b>ISOLATION CHARACTERISTICS</b>					
Parameter	Conditions	Min.	Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso= 1000VDC	10			GΩ
GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency	5V & 48V input types		62		
	12V & 15V input types		75		kHz
	24V input types		82		

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Specification	All output types	-40		85	
Storage		-50		125	°C
Case Temperature rise above ambient	5V, 12V, & 15V input types			15	
Case remperature rise above ambient	24V & 48V input types			20	
Cooling	Free air convection				

#### **TEMPERATURE DERATING GRAPH**



#### **OUTPUT VOLTAGE TOLERANCE ENVELOPE**



The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

#### **RoHS COMPLIANT INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. They are backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs



# **MER1 Series**

## 1kVDC Isolated 1W Single Output DC/DC Converters

#### **APPLICATION NOTES**

#### Minimum load


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

#### Capacitive loading and start up

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into a capacitance of 47µF with an increased start time, however, the maximum recommended output capacitance is 10µF.

	Start-up time		Start-up time
	μs		μs
MER1S0505SC	600	MER1S1512SC	3375
MER1S0509SC	1730	MER1S1515SC	5090
MER1S0512SC	3780	MER1S2405SC	431
MER1S0515SC	6700	MER1S2409SC	245
MER1S1205SC	750	MER1S2412SC	1634
MER1S1209SC	2605	MER1S2415SC	2682
MER1S1212SC	3754	MER1S4805SC	512
MER1S1215SC	5280	MER1S4809SC	1432
MER1S1505SC	704	MER1S4812SC	2528
MER1S1509SC	1859	MER1S4815SC	3884






#### **Ripple & Noise Characterisation Method**

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter
C2	$10\mu$ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than $100m\Omega$ at $100 \text{ kHz}$
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, $\pm$ 1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires
Measured va	ues are multiplied by 10 to obtain the specified values.

**Differential Mode Noise Test Schematic** 

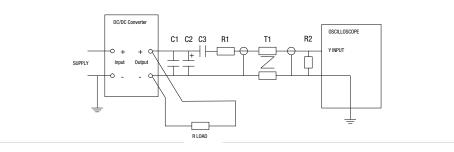

### **MER1 Series** 1kVDC Isolated 1W Single Output DC/DC Converters

#### **APPLICATION NOTES (continued)**

#### **Output Ripple Reduction**

By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

#### **Component selection**

Capacitor: It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended.

The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC/DC converter.

Inductor: The rated current of the inductor should not be less than that of the output of the DC/DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC/DC converter. The SRF (Self Resonant Frequency) should be >20MHz.



		Inductor		Capacitor
-	L, μΗ	SMD	Through Hole	C, μF
MER1S0505SC	10	82103C	11R103C	4.7
MER1S0509SC	22	82223C	11R223C	2.2
MER1S0512SC	47	82473C	11R473C	1
MER1S0515SC	47	82473C	11R473C	1
MER1S1205SC	10	82103C	11R103C	4.7
MER1S1209SC	22	82223C	11R223C	2.2
MER1S1212SC	47	82473C	11R473C	1
MER1S1215SC	47	82473C	11R473C	1
MER1S1505SC	10	82103C	11R103C	4.7
MER1S1509SC	22	82223C	11R223C	2.2
MER1S1512SC	47	82473C	11R473C	1
MER1S1515SC	47	82473C	11R473C	1
MER1S2405SC	10	82103C	11R103C	4.7
MER1S2409SC	22	82223C	11R223C	2.2
MER1S2412SC	47	82473C	11R473C	1
MER1S2415SC	47	82473C	11R473C	1
MER1S4805SC	10	82103C	11R103C	4.7
MER1S4809SC	22	82223C	11R223C	2.2
MER1S4812SC	47	82473C	11R473C	1
MER1S4815SC	47	82473C	11R473C	1

#### **TECHNICAL NOTES**

#### **ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions MER1 series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the MER1 series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

#### **REPEATED HIGH-VOLTAGE ISOLATION TESTING**


It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The MER1 series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

www.murata-ps.com

# **MER1 Series**

1kVDC Isolated 1W Single Output DC/DC Converters


### **EFFICIENCY VS LOAD**

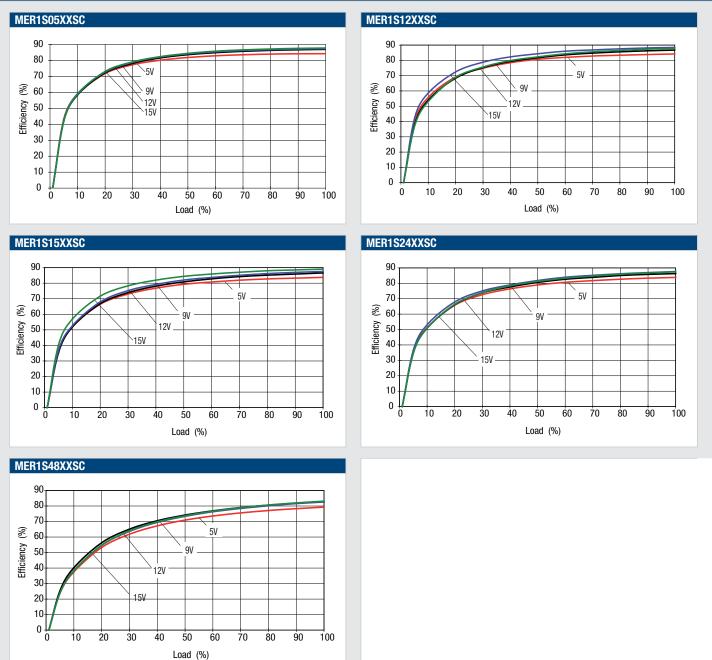

# **MER1 Series**

### \_\_\_\_ 1kVDC Isolated 1W Single Output DC/DC Converters



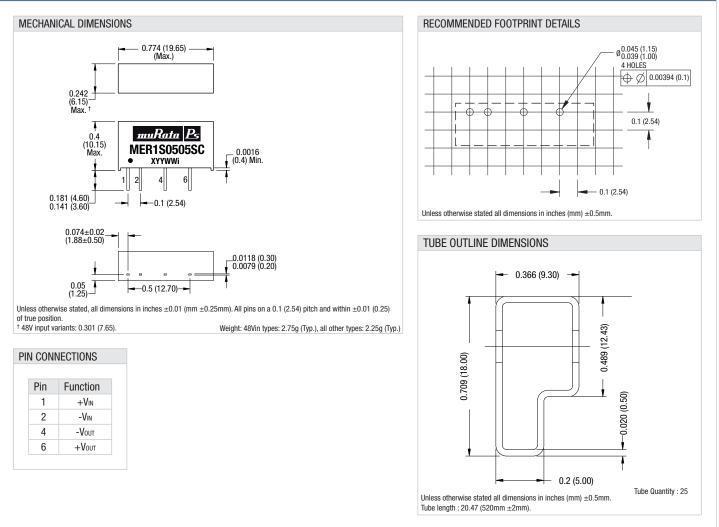

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2009 Murata Power Solutions, Inc.

www.murata-ps.com/locations

Technical enquiries email: mk@murata-ps.com, tel: +44 (0)1908 615232