


# RS1/RD1-S02

0.25 Watt unregulated  
single output

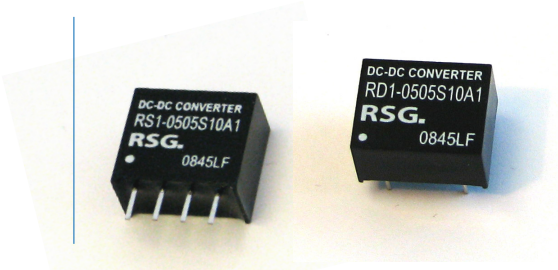

- 4 Pin SIP4 / 8 Pin DIP8 package
- 1000 VDC isolation up to 3000 VDC isolation
- Low ripple and noise
- Efficiency up to 72%
- -40°C~85°C operation temperature range
- Non-conductive black plastic case

## OUTPUT SPECIFICATIONS

Voltage accuracy	± 3%
Line regulation (Per 1% Vin Change)	± 1.2%
Load regulation (From 20% to 100% Load)	± 10%
(Output 3.3 V Model)	± 20%
Ripple & Noise (20 MHz bandwidth) (1)	100 mV pk-pk
Temperature coefficient	± 0.02%/°C
Capacitor load (2)	See table

## INPUT SPECIFICATIONS

Voltage range	± 10%
Max. input current	See table
No-load input current	See table
Input filter	Capacitors
Input reflected ripple current (3)	20 mA pk-pk

## GENERAL SPECIFICATIONS

Efficiency	See table
I/O isolation voltage (3 sec.)	
Input / output	1000 ~ 3000 VDC
I/O isolation capacitance	60 pF typ.
I/O isolation resistance	1000 M Ohm
Switching frequency	variable 80 kHz
Humidity	95% rel. H
Reliability calculated MTBF (MIL-HDBK-217F)	> 1.121 Mhrs.
Safety standard (designed to meet)	IEC 60950-1

## PHYSICAL SPECIFICATIONS

Case material	Non-conductive black plastic (UL94V-0 rated)
Pin material	SIP case > 0.5 mm Alloy42 solder-coated DIP case > Ø 0.5 mm brass solder-coated
Potting material	Epoxy (UL94V-0 rated)
Weight	SIP > 1.5 g, DIP > 1.8 g
Dimensions	SIP > 0.46" x 0.24" x 0.4" DIP > 0.50" x 0.40" x 0.27"

## ENVIRONMENT SPECIFICATIONS

Operating temperature	-40°C~ 85°C (See derating curve)
Maximum case temperature	100°C
Storage temperature	-40°C~125°C
Cooling	Nature convection

## ABSOLUTE MAXIMUM RATINGS (4)

These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

Input voltage (100 mS)

5 modes	0 ~ 7 VDC
12 modes	0 ~ 15 VDC
24 modes	0 ~ 28 VDC
48 modes (SIP)	0 ~ 54 VDC

Lead soldering temperature 260°C

(1.5 mm from case 10 sec.)

*All specifications typical at Ta = 25°C, nominal input voltage and full load unless otherwise specified.*

*The information and specifications contained in this data sheet are believed to be correct at time of publication. However, we accept no responsibility for consequences arising from printing errors or inaccuracies. Subject to change without notice.*

## NOTE

- 1) Ripple / Noise measured with 20 MHz bandwidth.
- 2) Tested by minimal Vin and constant resistive load.
- 3) Measured input reflected ripple current with a simulated source inductance of 12uH.
- 4) Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
- 5) Operation under no-load conditions will not damage these devices. However they may not meet all listed specifications.

*The models listed are just for standard type. If you need a special specification product, please contact our service. Phone: +49 69 984047-0, mail to: info@rsg-electronic.de or use the forms on www.rsg-electronic.de („Kontakt“).*

# RS1/RD1-S02

## MODEL SELECTION GUIDE

Model Number	Input Range VDC	Input current (mA) No Load / Full Load	Output VDC	Output current Full Load (mA)	Efficiency @FL (%)	Capacitor Load (μF)
RS1-0503S02AX	5	20 / 75	3.3	75.7	66	100
RS1-0505S02AX	5	20 / 75	5	50	66	100
RS1-0507S02AX	5	20 / 75	7.2	34.72	66	100
RS1-0509S02AX	5	20 / 73	9	27.77	68	100
RS1-0512S02AX	5	20 / 73	12	20.83	68	100
RS1-0515S02AX	5	20 / 73	15	16.67	68	100
RS1-0518S02AX	5	20 / 73	18	13.88	68	100
RS1-0524S02AX	5	20 / 71	24	10.41	70	100
RS1-1203S02AX	12	15 / 31	3.3	75.7	66	100
RS1-1205S02AX	12	15 / 31	5	50	67	100
RS1-1207S02AX	12	15 / 30	7.2	34.72	68	100
RS1-1209S02AX	12	15 / 30	9	27.77	68	100
RS1-1212S02AX	12	15 / 30	12	20.83	68	100
RS1-1215S02AX	12	15 / 30	15	16.67	69	100
RS1-1218S02AX	12	15 / 29	18	13.88	70	100
RS1-1224S02AX	12	15 / 28	24	10.41	72	100
RS1-2403S02AX	24	8 / 15	3.3	75.7	67	100
RS1-2405S02AX	24	8 / 15	5	50	67	100
RS1-2407S02AX	24	8 / 15	7.2	34.72	67	100
RS1-2409S02AX	24	8 / 15	9	27.77	69	100
RS1-2412S02AX	24	8 / 15	12	20.83	69	100
RS1-2415S02AX	24	8 / 15	15	16.67	69	100
RS1-2418S02AX	24	8 / 15	18	13.88	69	100
RS1-2424S02AX	24	8 / 15	24	10.41	69	100
RS1-4803S02AX	48	5 / 8.1	3.3	75.7	64	100
RS1-4805S02AX	48	5 / 7.8	5	50	66	100
RS1-4807S02AX	48	5 / 7.8	7.2	34.72	66	100
RS1-4809S02AX	48	5 / 7.8	9	27.77	66	100
RS1-4812S02AX	48	5 / 7.7	12	20.83	67	100
RS1-4815S02AX	48	5 / 7.7	15	16.67	67	100
RS1-4818S02AX	48	5 / 7.7	18	13.88	67	100
RS1-4824S02AX	48	5 / 7.5	24	10.41	69	100
RD1-0503S02AX	5	20 / 75	3.3	75.7	66	100
RD1-0505S02AX	5	20 / 75	5	50	66	100
RD1-0507S02AX	5	20 / 75	7.2	34.72	66	100
RD1-0509S02AX	5	20 / 73	9	27.77	68	100
RD1-0512S02AX	5	20 / 73	12	20.83	68	100
RD1-0515S02AX	5	20 / 73	15	16.67	68	100
RD1-0518S02AX	5	20 / 73	18	13.88	68	100
RD1-0524S02AX	5	20 / 71	24	10.41	70	100
RD1-1203S02AX	12	15 / 31	3.3	75.7	66	100
RD1-1205S02AX	12	15 / 31	5	50	67	100
RD1-1207S02AX	12	15 / 30	7.2	34.72	68	100
RD1-1209S02AX	12	15 / 30	9	27.77	68	100
RD1-1212S02AX	12	15 / 30	12	20.83	68	100
RD1-1215S02AX	12	15 / 30	15	16.67	69	100
RD1-1218S02AX	12	15 / 29	18	13.88	70	100
RD1-1224S02AX	12	15 / 28	24	10.41	72	100
RD1-2403S02AX	24	8 / 15	3.3	75.7	67	100
RD1-2405S02AX	24	8 / 15	5	50	67	100
RD1-2407S02AX	24	8 / 15	7.2	34.72	67	100
RD1-2409S02AX	24	8 / 15	9	27.77	69	100
RD1-2412S02AX	24	8 / 15	12	20.83	69	100
RD1-2415S02AX	24	8 / 15	15	16.67	69	100
RD1-2418S02AX	24	8 / 15	18	13.88	69	100
RD1-2424S02AX	24	8 / 15	24	10.41	69	100


# RS1/RD1-S02

0.25 Watt unregulated  
single output

## NUMBER STRUCTURE


<b>RD1</b>	-	<b>XX</b>	<b>XX</b>	<b>D</b>	<b>10</b>	<b>A</b>	<b>X</b>
<b>Name/Package</b>			<b>Output</b>		<b>Power</b>	<b>Code</b>	<b>Isolation</b>
RS1=SIL4 RD1=DIL8			03=3.3V 05=5V 07=7.2V 09=9V 12=12V 12=12V 15=15V 18=18V 24=24V	<b>Type</b> S=Single	02=0.25W	internal	1=1.0 kVDC 3=3.0 kVDC
<b>Input</b>							
05=5V 12=12V 24=24V 48=48V							

## DERATING CURVE

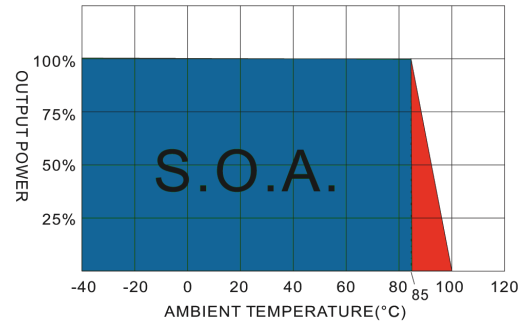


## LOADING VS OUTPUT VOLTAGE

### 5 MODELS

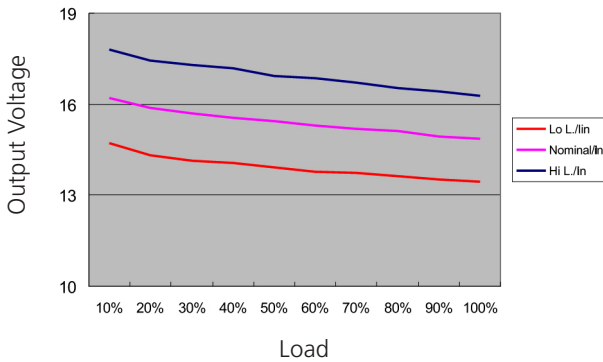


## LOADING VS OUTPUT VOLTAGE

### 12 MODELS

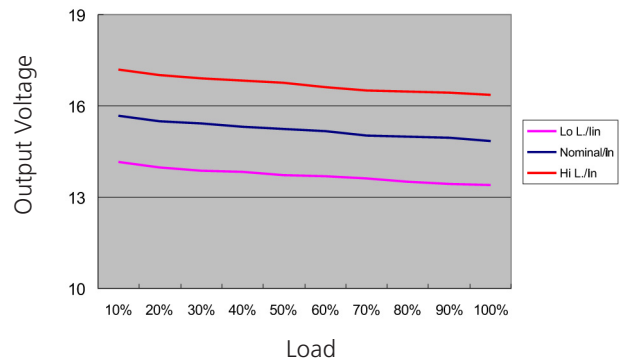


## MECHANICAL SPECIFICATIONS 4 Pin SIL

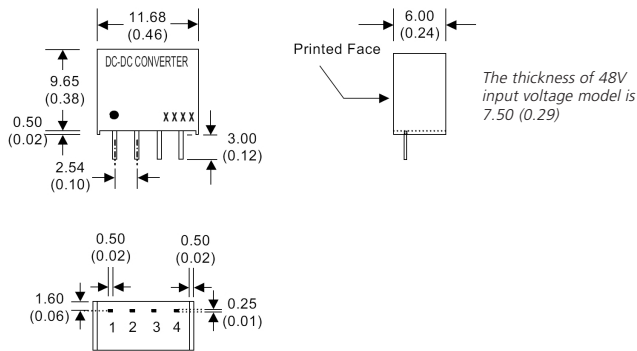

## PIN CONNECTIONS

Pin Number	Single 4 Pin SIL	Single 8 Pin DIL
1	-V Input	-V Input
2	+V Input	
3	-V Output	
4	+V Output	
5		+V Input
7		+V Output -V Output

## MECHANICAL SPECIFICATIONS 8 Pin DIL

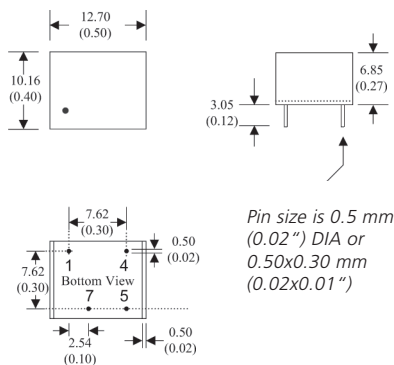

### Notes:

All dimensions are typical in millimeters (inches).

- 1) Pin diameter:  $0.5 \pm 0.05$  ( $0.02 \pm 0.002$ )
- 2) Pin pitch tolerance:  $\pm 0.35$  ( $\pm 0.014$ )
- 3) Case tolerance:  $\pm 0.5$  ( $\pm 0.02$ )